



## KG4 SERIES BULKHEAD FITTING GLAND

- *High levels of EMC performance*
- *Overall screening by braid trap system*
- *Individual screening by interwoven braid and slotted body*
- *Lightweight and compact in aluminium – suitable for all panel applications*
- *Sealing by o-ring seal and heat shrink boot*


The **KG4** series is part of the **KG** range of high performance, bulkhead glands. A variety of techniques are used in the range to provide electromagnetic compatibility, including TEMPEST level performance, for both individual and overall screening and environmental protection.

Suitable for both highly sophisticated and simpler solutions, the KG range is available at prices that are viable for small batch to high volume production runs. The range is ideal for all defence and aerospace as well as commercial and industrial applications.

**KEC Limited** is an EMC interconnect specialist that manufactures a wide selection of backshells, bulkhead/panel glands, conduit and conduit fittings and system harnesses.

KEC products are designed to suit all levels of screening requirements for EMI/RFI, EMP, TEMPEST and environmental protection and are designed to help manufacturers comply with UK and EC screening directives.

## KG4 BULKHEAD GLAND

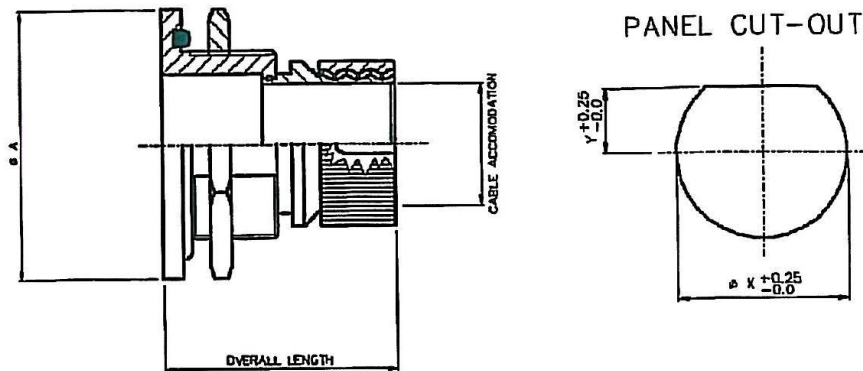

### TYPICAL PART NUMBER

**KG401-08JN-XXX**




TABLE 1

MATERIAL CODE	
01	ALUMINIUM
02	STAINLESS STEEL
03	ALI BRONZE

TABLE 3

CODE	DESCRIPTION
C	CLAMP BARS
T	TIE POST
N	PLAIN NUT

TABLE 4

CODE	DESCRIPTION
J	ELECTROLESS NICKEL
W	CADMIUM + OLIVE DRAB
Z	ZINC COBALT + OLIVE DRAB

TABLE 2

ENTRY CODE	MAX CABLE ACCOMMODATION	Ø A	PANEL CUT-OUT DIMENSIONS		OVERALL LENGTH
			X	Y	
08	6.5	28.5	16.1	7.4	37.5
10	9.3	31.8	19.3	8.9	
12	12.7	34.8	22.5	10.5	
14	14.4	38.1	25.6	12.0	
16	17.8	41.2	28.8	13.6	
18	19.6	44.5	32.0	15.3	
20	24.1	47.5	35.2	16.9	
22	27.0	50.8	38.4	18.5	
24	29.2	53.8	41.5	20.0	

### NOTES:

1. THE ABOVE INFORMATION IS TYPICAL AND MANY OTHER OPTIONS & VARIATIONS ARE AVAILABLE, PLEASE CONSULT FACTORY.
2. THE OVERALL LENGTH STATED IS BASED ON A GLAND USING A PLAIN NUT AND DOES NOT INCLUDE THE ADDITIONAL HEIGHT INCURRED WHEN USING CLAMP BARS OR TIE POST.
3. APPLICABLE PANEL THICKNESS RANGE: 1.4mm TO 9.5mm
4. USE MOD CODE 100 AS A SUFFIX ON THE PART NUMBER TO CALL UP GRADE 316L STAINLESS STEEL.
5. KG4 SUPPLIED WITH WOVEN BRAID.

### KEC LIMITED

Orpheus House, Calleva Park, Aldermaston, Reading, Berkshire RG7 8TA England  
 Tel: +44 (0)118 981 1571 Fax: +44 (0)118 981 1570 email: sales@kec.co.uk www.kec.co.uk